


X2D

WIRELESS DIGITAL PROGRAMMABLE ROOM THERMOSTAT (Emitter-receiver)



E-X2D
(emitter)

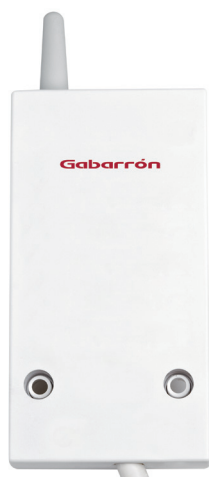

R-X2D
(receiver)

Thermostat with both daily and weekly programmable options allowing different combinations with three levels of temperature, comfort, economy and frost-protection. LCD display backlit in blue showing ambient temperature, set up temperature, battery level and other information. Optimized ergonomics. Temperature control of a zone. Anti-seizing function of pump (Boilers).

Technical Features

Emitter EX2D

- ▶ Power supply: 2 LR03 Batteries (supplied).
- ▶ Output: 2 A relay.
- ▶ Regulation: P.I.D. or On/Off.
- ▶ Mounting: wall-mounted on a support or on flush-mounted box.

Receiver RX2D

- ▶ Power supply: 230 V.
- ▶ Output: 2x3 A relay.
- ▶ Insulation: Class II.
- ▶ Protection index: IP44.
- ▶ Mounting: wall mounted.

Suitable for:

- Dynamic Storage Heaters ADL range.
- Electric Boilers MAS, CMXi, CMXPi and CPE ranges.

MODEL	E-X2D (emitter)	R-X2D (receiver)
Range	+5°C to 30°C	
Accuracy		± 0.25°C
Dimensions	cm 13.5x8x2	13x5.5x2
Certifications	CE	CE
EAN	8432336610752	8432336610776