


ACTIVE SLIM



Electric water heater, vertical installation

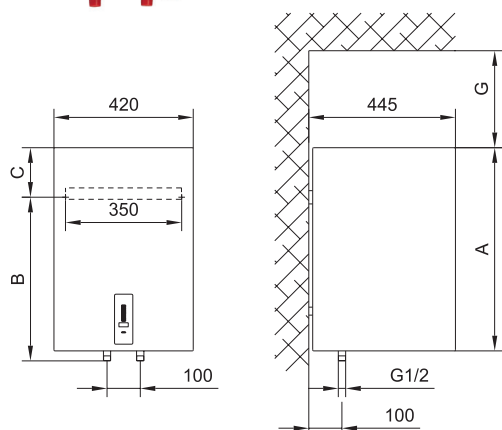


Active Slim control panel



Technical Features

- ▶ 42 cm wide.
- ▶ Enamelled steel tank with anti-corrosion protection.
- ▶ Magnesium anode.
- ▶ Dielectric hoses with high mechanical resistance.
- ▶ Direct immersion electric heating element.
- ▶ Control panel led with temperature level selected and errors signaling.
- ▶ Water heater On/Off and temperature adjustment key.
- ▶ 7 LED temperature indicator.
- ▶ Operation indicator in ECO SMART mode. 
- ▶ Led indicator in Frost-Protection temperature level. 
- ▶ Self-learning function.
- ▶ "Dry-Firing" protection that prevents turning on the water heater if it is not filled with water before connecting.
- ▶ Safety thermostat and overheating protection.
- ▶ Non-return and pressure relief valve.
- ▶ High quality insulation against heat losses.
- ▶ Supplied with 1m main cable and plug for electrical connection.
- ▶ Thermostatic valve offered as accessory.

MODELO ACTIVE SLIM		GTD-30	GTD-50
Capacity	L	30	50
Output	W	2000	2000
Current	A	8.7	8.7
Voltage		230 V	230 V
Frecuency	Hz	50	50
Insulation		Clase I	Clase I
IP degree		IP24	IP24
Colour		Blanco	Blanco
Average consumption to keep water at 65 °C ⁽¹⁾	kWh/24h	0.69	0.94
Heating time 65 °C from 10 °C		59 min	1 h 38 min
Quantity of water available with 40 °C mixture ⁽²⁾	L	45	68
Water connections		1/2"	1/2"
Net weight without water	kg	19	24
Dimension A	cm	51	69
Dimension B	cm	31	47
Dimension C	cm	23.5	25
Dimension G	cm	18	26
Wide	cm	42	42
Depth	cm	44.5	44.5



Energy classification according to European Regulation 812/2013. (1) Valid values for an ambient temperature of 20°C and 65°C hot water temperature in the heater (Standard EN 60379: 2005). (2) Standard EN 50440.